

SRP-770III

4 inch Direct Thermal
Desktop Label Printer



Retail



Healthcare
&
Pharmacy




Post &
Parcel



Warehouse &
Storage
Handling

Reliable and Affordable

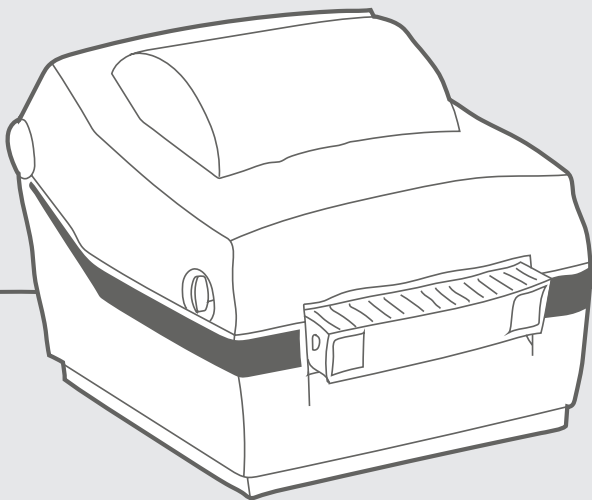

127
mm/sec

5
IPS

Premium-Level Performance

- Fully compatible with market-leading programming languages
- Fast data processing and printing speed up to 5 ips (127 mm/sec)
- Quick data processing speed of numerous label varieties



User Friendly Design

- Easy paper loading with adjustable paper guide
- Pause and cancel function-keys
- Various Options :
Peeler (Default), WLAN (USB dongle type)



All in one Plus™ Interface

- Standard: USB + Serial + Parallel
- Optional: USB + Serial + Ethernet

All-in-one



SRP-770III

4 inch Direct Thermal Desktop Label Printer

Specifications

Print Characteristics

Print Method

Direct Thermal

Print Speed

Up to 5 ips (127 mm/sec)

Print Resolution

203 dpi

Print Width

Up to 104 mm

Print Length

6 ~ 1000 mm

Media Sensor

Transmissive, Reflective, Head open

Media Characteristics

Media Type

Gap, Black Mark, Notch, Continuous, Fan-Fold

Media Width

42 ~ 106 mm

Media Roll Diameter

Up to 130 mm

Media Roll Diameter

0.06 ~ 0.20 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (W x L x H)

189 x 231 x 171 mm
(7.44 x 9.09 x 6.73 inch)

Weight

1.53kg (3.37 lbs)

Power

EnergyStar Certified,
External Power Adaptor 100-240V AC, 50/60Hz

Performance Characteristics

Memory

64 MB SDRAM, 128 MB FlashROM

Interface

Standard: USB + Serial + Parallel

Optional: USB + Serial + Ethernet + WLAN*

* WLAN: 802.11b/g/n USB dongle type (Optional)

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

Software

Emulation

SLCS, BPL-Z™, BPL-E™

Driver / Utility

Windows Driver (Euro Plus/Seagull),
Linux / Mac CUPS Driver, Utility Program,
Label Artist-II™

SDK

Linux SDK

Fonts / Graphics / Symbologies

Fonts

- 10 SLCS Resident Bitmap Fonts
- One SLCS Resident Scalable Font
- 16 BPL-Z™ Resident Bitmap Fonts
- One BPL-Z™ Resident Scalable Font
- 5 BPL-E™ Resident Bitmap Fonts
- 23 Code Page
- Unicode supported (UTF-8, UTF-16LE, UTF-16BE)

Graphics

Supporting user-defined fonts, graphics, formats, and logos

Barcode Symbologies

- 1D: Codabar, Code 11, Code 39, Code 93, Code 128, EAN-13, EAN-8, Industrial 2-of-5, Interleaved 2-of-5, Logmars, MSI, Plessey, Postnet, GS1 DataBar (RSS-14), Standard 2-of-5, UPC/EAN extensions, UPC-A, UPC-E, IMB
- 2D: Aztec, Codablock, Code49, Data Matrix, MaxiCode, MicroPDF417, PDF417, QR Code, TLC39

Optional

Ethernet, WLAN (USB dongle type)

