




1. Turn the Power Switch Off at the rear of the Printer and open the Cover.

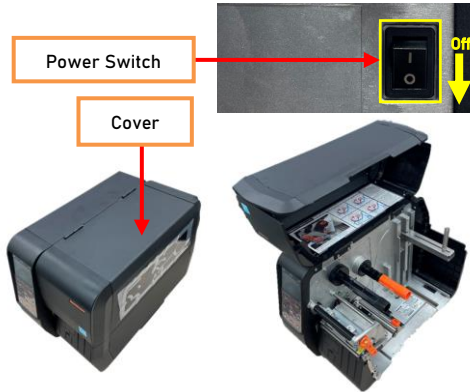


5. Insert Peeler Wire into Peeler Connector and arrange wire with Cable Tie.

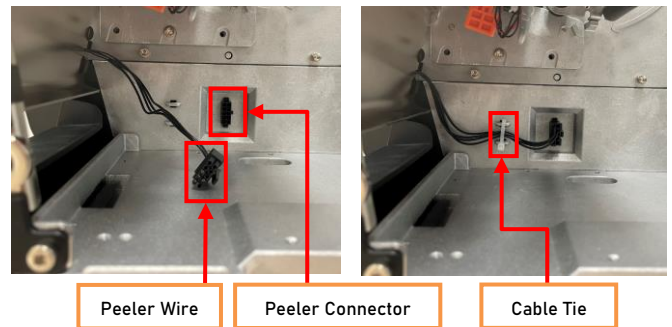


2. Disassemble the Cover STD by pressing it down (yellow arrow).

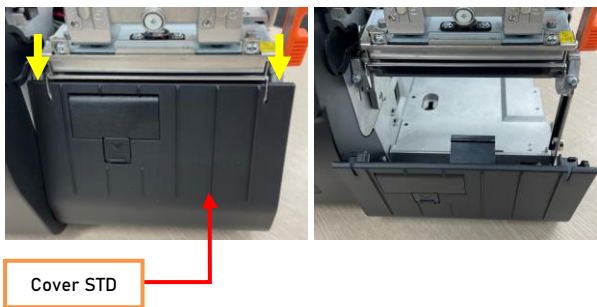


6. Please close the Cover.

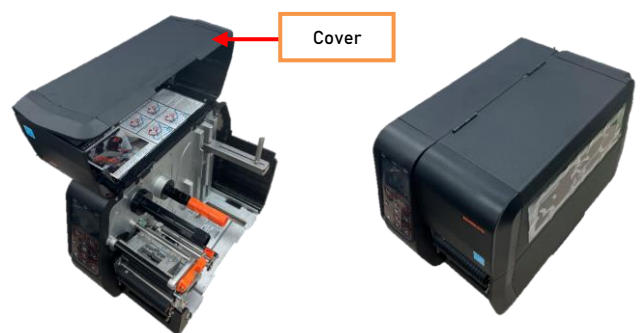

3. Align the red marked part with the yellow square groove, and assemble with 2 screws provided.

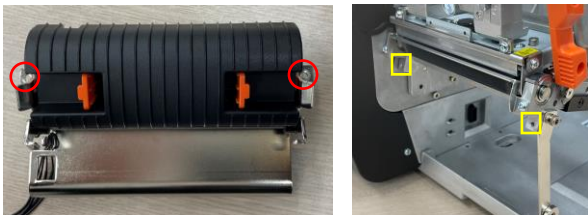


4. Loosen 1(one) side Screw at the below red marked.

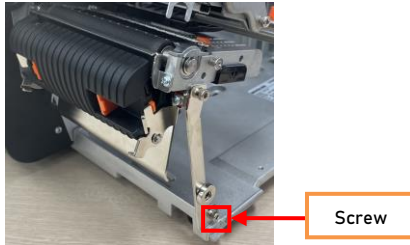


4. Insert & assemble the hook on the red circle mark into the yellow mark and tighten the screw loosened in step 4.


※ When assembling, be careful not to pinch the wire.

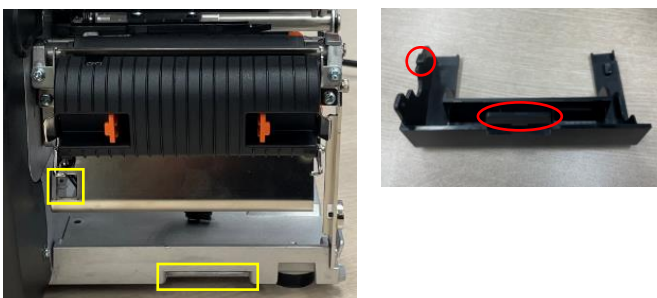

7. Press the Peeler Lever inward (yellow arrow) to open the cover, and change the Switch to On. Then close the Peeler Cover until it clicks into place.

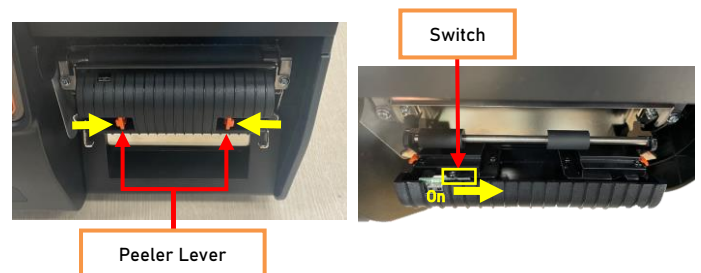


8. Turn on the power and check if the Peeler Sensor LED turns green.

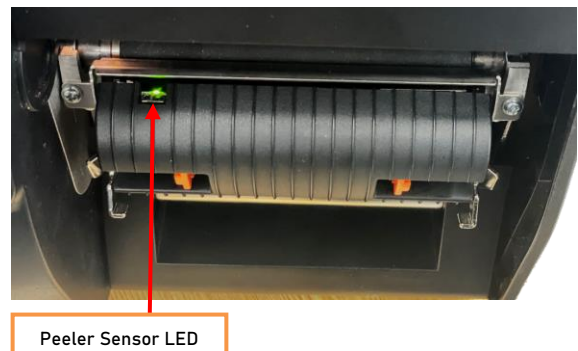


※ Refer to the User Manual for how to install paper.


1. Printer 후면의 Power Switch 를 Off 하고 Cover 를 열어주십시오

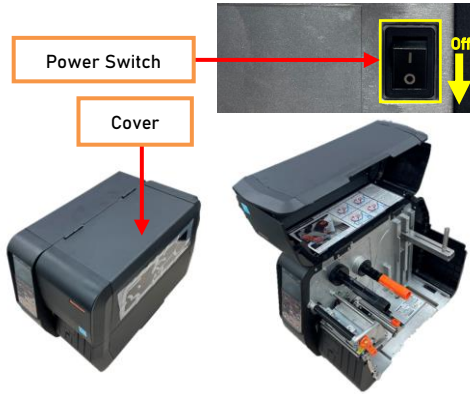


5. Peeler Wire 를 방향에 맞추어 Peeler Connector 에 삽입하고 Cable Tie 로 Wire 를 고정하십시오.

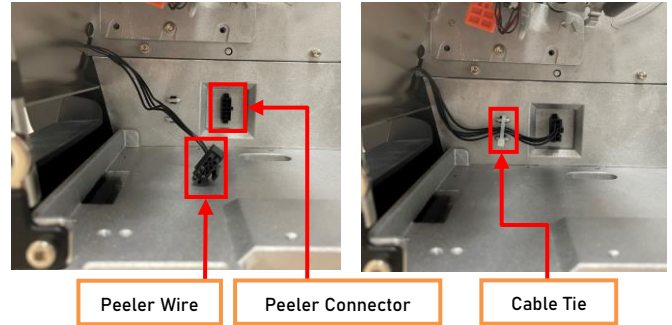


2. Cover STD 를 아래 방향(노란색 화살표)으로 눌러 분리하십시오.

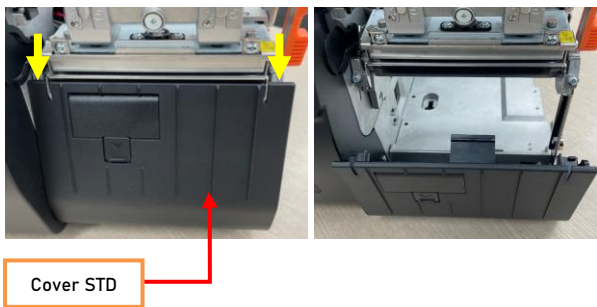


6. Cover 를 닫아주십시오.

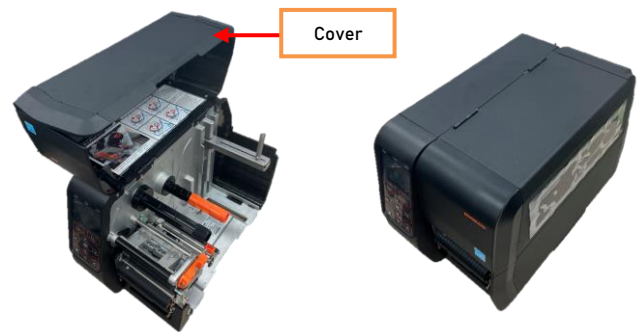


3. 빨간색 원 표시 부 Hole 을 노란색 사각형 홈에 맞추어 제공된 Screw 2 개를 체결하십시오.

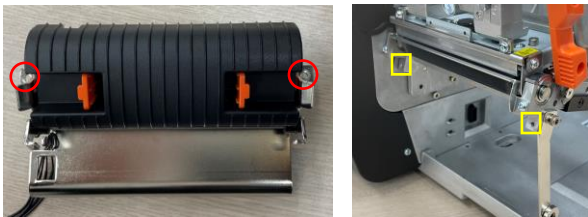


4. 측면 Screw 1 개를 분리하십시오.

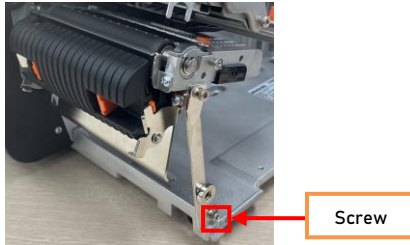


4. 빨간색 원 표시 부의 Hook 을 노란색 사각형 홈에 삽입하여 조립하고 순서 4 에서 분리한 Screw 를 체결하십시오
※ 조립 시 Wire 가 끼이지 않도록 주의하십시오.

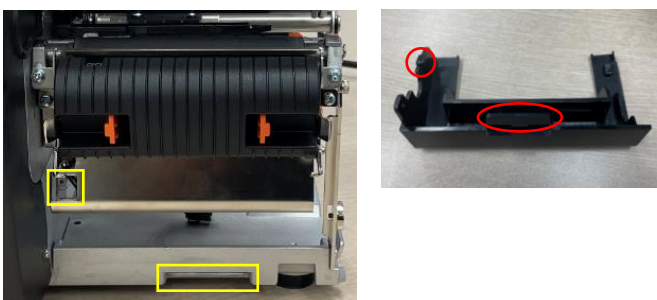

7. Peeler Lever 를 안쪽방향(노란색 화살표)으로 눌러 커버를 열고 하기와 같이 Switch 를 On 으로 변경하십시오. 그리고 Peeler Cover 를 딸깍 소리가 날때까지 닫아주십시오.

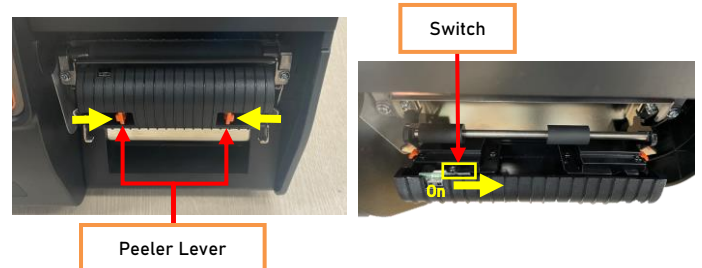

8. 전원장치를 연결하여 전원을 켜고 Peeler Sensor LED 에 녹색 점등이 되는지 확인하십시오.

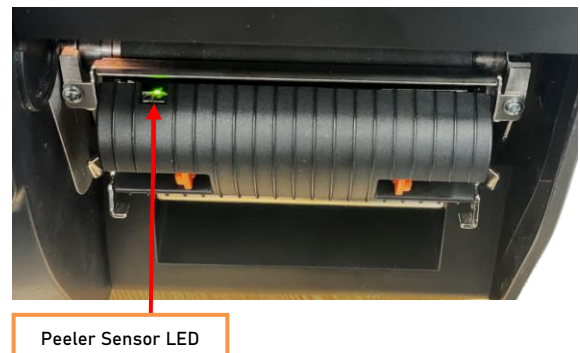

※ 용지 설치 방법은 User Manual 을 참조하여 주십시오.