



유통



병원·약국



우편·택배




창고관리

SLP-TX420

4인치 열전사방식
데스크탑 라벨 프린터

Compact, Durable and Premium

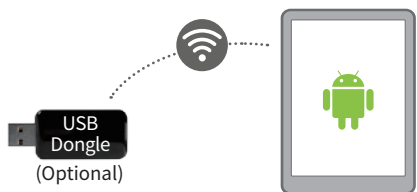


비즈니스 환경에 유연

- 안드로이드 태블릿 PC와 연동을 위한 SDK 지원
- 윈도우, 리눅스, 맥 PC용 드라이버 지원
- 옵션형 무선통신 지원: USB dongle 타입의 WLAN
- 다양한 유선통신 지원: USB, Serial, Parallel, Ethernet



프리미엄급 제품 설계

- 74m이하 리본 전용 콤팩트한 디자인
- 최고 7 ips (178 mm/sec)의 인쇄속도
- 대용량 메모리 탑재로 빠른 데이터 처리
- 에너지 고효율 제품

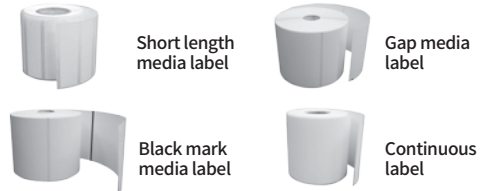

인텔리전트 기능 탑재

- Smart Media Detection™은 용지의 타입과 라벨의 길이를 프린터 스스로 판별해 출력하는 기능
- Intelligent Leap-over™는 용지에서 비어있는 라벨을 발견하면 자동으로 그 다음 라벨에 출력하는 기능



SLP-TX420

4인치 열전사방식 데스크탑 라벨 프린터



Standard

Auto-cutter

Peeler

Features

강력한 호환성

주요 프로그래밍 언어와 완벽하게 호환되며 이를 자동으로 인식해 출력합니다.



BPL-Z™

BPL-E™

편리한 소모품 교체

- 리본과 용지 장치가 간편합니다.
- 프린트 헤드나 롤러를 도구없이 교체할 수 있습니다.



빅솔론 Label Artist™

엑셀, 텍스트, 액세스 파일 등으로 작성된 데이터베이스를 불러와 출력하거나 사용자가 직접 라벨 디자인을 변경할 수 있는 프로그램을 무상으로 제공하고 있습니다.

Specifications

Printer Specifications	
Print Method	Thermal Transfer, Direct Thermal
Print Speed	SLP-TX420: Up to 7 ips (178 mm/sec) SLP-TX423: Up to 5 ips (127 mm/sec)
Print Resolution	SLP-TX420: 203 dpi / SLP-TX423: 300 dpi
Print Width	SLP-TX420: Up to 108 mm / SLP-TX423: Up to 105.7 mm
Print Length	6 ~ 2000 mm
Sensor	Transmissive, Reflective (adjustable), Ribbon-End, Head open
Media Characteristics	
Media Type	Gap, Black Mark, Notch, Continuous, Fan-Fold
Media Width	20 ~ 110 mm
Media Roll Diameter	Up to 130 mm
Media Thickness	Easy Paper Loading
Ribbon Characteristics	
Ribbon Type	Wax, Wax/Resin, Resin, Outside
Ribbon Width	110 mm
Ribbon Length	Up to 74 m
Core Inner Diameter	12.5 mm
Physical Characteristics	
Dimensions (WxLxD)	200 x 252 x 173 mm (7.87 x 9.92 x 6.81 inch)
Weight	2.35 kg (5.18 lbs.)
Power	EnergyStar Certified, External Power Adaptor 100-240V AC, 50/60Hz
Performance Characteristics	
Memory	64MB SDRAM, 128MB FlashROM
Interface	Standard: USB+Serial+Parallel Optional: ① USB+Serial+Ethernet+WLAN* ② USB+WLAN*+Bluetooth** * WLAN: 802.11b/g/n USB dongle type (optional) ** Bluetooth: Built-in type, MFi iAP2 certified
Environment Characteristics	
Temperature	Operating: 5 ~ 40°C (41 ~ 104°F) Storage: -20 ~ 60°C (-4 ~ 140°F)
Humidity	Operating: 10 ~ 80% RH / Storage: 10 ~ 90% RH
Software	
Emulation	SLCS, BPL-Z™, BPL-E™
Driver / Utility	Windows Driver (Euro Plus/Seagull), Linux CUPS Driver, Mac Driver, Virtual COM USB/Ethernet Driver, Utility Program, Label Artist™
SDK	Android SDK, Windows SDK
Fonts / Graphics / Symbologies	
Fonts	<ul style="list-style-type: none"> • 10 SLCS Resident Bitmap Fonts • One SLCS Resident Scalable Font • 16 BPL-Z™ Resident Bitmap Fonts • One BPL-Z™ Resident Scalable Font • 5 BPL-E™ Resident Bitmap Fonts • 23 Code Page • Unicode supported (UTF-8, UTF-16LE, UTF-16BE)
Graphics	Supporting user-defined fonts, graphics, formats, and logos
Barcode Symbologies	1D: Codabar, Code 11, Code 39, Code 93, Code 128, EAN-13, EAN-8, Industrial 2-of-5, Interleaved 2-of-5, Logmars, MSI, Plessey, Postnet, GS1 DataBar (RSS-14), Standard 2-of-5, UPC/EAN extensions, UPC-A, UPC-E, IMB 2D: Aztec, Codablock, Code49, Data Matrix, MaxiCode, MicroPDF417, PDF417, QR code, TLC39
Options	
Ethernet, WLAN (USB dongle type), Peeler, Auto Cutter, RTC (Real Time Clock), External Paper Supply	

