

# SRP-330II

3인치 POS용  
영수증 프린터



유통



관광, 외식



티케팅



게임




은행



키오스크

# Durable and Cost-Efficient

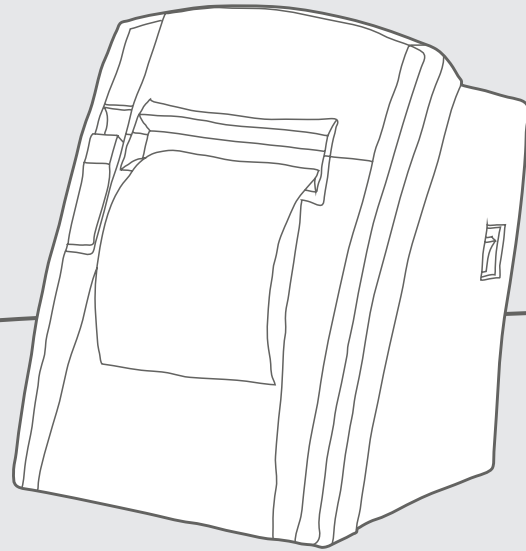

### 효율적인 비용 관리

- All in one Plus™ Interface 지원
- Triple Interface : USB V2.0 FS + Ethernet + Serial
- Dual Interface : USB V2.0 FS + Serial  
USB V2.0 FS + Parallel  
USB V2.0 FS + SD
- 용지절감 기능지원: 영수증 발행길이 최고 25%  
축소가능
- SD 타입 키친벨 기본장착 (4종)

220  
mm/sec

TPH  
150km



### 믿을 수 있는 프린팅 성능

- 최고 220 mm/sec 인쇄 속도
- 최고의 신뢰성 보증 : 150km의 TPH &  
150만 컷의  
오토커터
- 203 dpi 지원



### 사용자 중심의 디자인

- 벽걸이 형으로 공간 절약 가능
- 2인치, 3인치 용지 선택
- 기본약세사리로 2인치 파티션 제공
- 용지 걸림 방지 가이드 (Anti-jam)
- Easy Tracking™:  
프린터 하단부에 위치한 QR코드로  
기술 지원 관련 영상 및 정보 제공



# SRP-330II

3인치 POS용  
영수증 프린터

## Specifications

### Print Characteristics

**Print Method**

Direct Thermal

**Print Speed**

Up to 220 mm/sec

**Print Resolution**

SRP-330II: 180 dpi

SRP-332II: 203 dpi

**Print Width**

Up to 72 mm

**Sensor**

Paper End, Cover Open

### Media Characteristics

**Media Type**

Receipt

**Media Width**

80 mm, 58 mm (with 2 inch Partition)

**Media Roll Diameter**

Up to 80 mm

**Media Thickness**

0.062 ~ 0.075 mm

**Supply Method**

Easy Paper Loading

### Physical Characteristics

**Dimensions (W x L x D)**

145 x 198 x 146 mm

(5.72 x 7.79 x 5.74 inch)

**Weight**

1.37 kg (3.02 lbs.)

**Power**

EnergyStar Certified,

External Power Adaptor 100-240V AV, 50/60Hz

**Drawer Port**

2 ports (via y-type adaptor)

### Performance Characteristics

**Memory**

64 Mbit SDRAM, 32 Mbit FlashROM

**NV Image Memory**

768 Kbytes (Mono)

**Receive Buffer**

4 Kbytes

**User Define Buffer**

12 Kbytes

**Interface**

① USB V2.0 FS + Ethernet + Serial

② USB V2.0 FS + Serial

③ USB V2.0 FS + Parallel

④ USB V2.0 FS + SD

### Environment Characteristics

**Temperature**

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

**Humidity**

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

### Reliability

**Thermal Print Head (TPH)**

150 km

**Auto Cutter**

1.5 Million Cuts

### Software

**Emulation**

BXL / POS

**Driver / Utility**

Windows Driver, OPOS Driver, JPOS Driver,

Linux CUPS Driver, Mac Driver,

Virtual COM USB/Ethernet Driver, Utility Program

**SDK**

iOS SDK, Android SDK

### Fonts / Graphics / Symbologies

**Character Size**

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24

KOR, CHN, JPN: 24 x 24

**Characters Per Line**

SRP-330II: - Font A: 42 Font B, C: 56

KOR, CHN, JPN: 21

SRP-332II: - Font A: 48 Font B, C: 64

KOR, CHN, JPN: 24

**Character Sets**

Alphanumeric: 95

Extended Graphics: 128 x 33 page

International: 32

**Graphics**

Supporting user-defined fonts, graphics, formats, and logos

**Barcode Symbologies**

1D: Coda Bar, Code39, Code93, Code128, EAN-8, EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR Code

### Accessories

**Optional**

USB A-B Cable, External buzzer, B-Melodist, 2 inch partition



BR-SRP-330II-KR-MAR17-V1-NF

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

**BIXOLON®**

**BIXOLON Co., Ltd.**  
+82 (0) 31 218 5500  
sales@bixolon.com

**BIXOLON America Inc.**  
+1 858 764 4580  
sales@bixolonusa.com

**BIXOLON Europe GmbH**  
+49 211 68 78 54 0  
sales@bixolon.de

www.Bixolon.com

