


SRP-380

3인치 POS용
영수증 프린터




Ultra Reliable

Long-term limited warranty

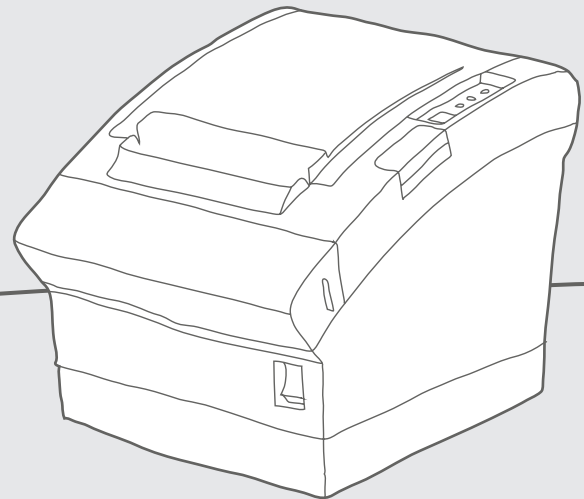

350
mm/sec

TPH
250Km

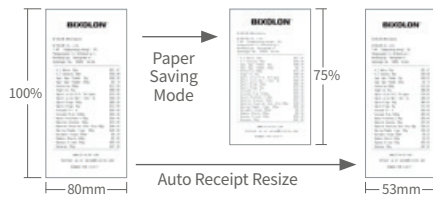

Easy Tracking™



보장된 비즈니스 연속성

- 장기 무상 보증 지원 (문의필요)
- 최고의 신뢰성 보증 : 250km TPH & 3백만 오토 커터
- 최고 350mm / sec 인쇄 속도 (타 모델 대비 17% 속도 향상)
- USB V2.0 + Serial, Ethernet, Powered USB, Bluetooth or WLAN

비용 효율성

- 다양한 S/W와 F/W를 이용한 용지 절감 기능
- 축소 인쇄 기능 지원 (영수증 길이 최대 25% 축소)
- 자동 크기 조절 기능, 영수증 80~50 mm 자동 용지 축소
- 다국어 지원 가능 Anywhere Anyfont™ (Unicode)
- iOS, 안드로이드, 윈도우 등 스마트 기기와 호환

유지 보수 비용 절감

- 통계 데이터를 이용한 TPH, 오토 커터 사용량 측정
- 프린터 하단에 부착된 QR코드로 다양한 기술 지원 동영상 및 기술 FAQ 지원

SRP-380

3인치 POS용
영수증 프린터

Specifications

Print Characteristics

Print Method

Direct Thermal

Print Speed

Up to 350 mm/sec

Print Resolution

SRP-380: 180 dpi

SRP-382: 203 dpi

Print Width

Up to 72 mm

Sensor

Paper End, Paper Near End, Cover Open

Media Characteristics

Media Type

Receipt

Media Width

80 mm

58 mm (with 2 inch Partition)

Media Roll Diameter

Up to 83 mm

Media Thickness

0.062 ~ 0.075 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (WxLxD)

147 x 200 x 148 mm

(5.70 x 7.87 x 5.82 inch)

Weight

1.56 kg (3.43 lbs)

Power

EnergyStar Certified,

External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port

2 ports (via y-type adaptor)

Performance Characteristics

NV Image Memory

768 Kbytes (Mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

Standard: USB V2.0 FS

Optional: USB V2.0 FS + Ethernet / Serial /

Dual Serial / WLAN* /

Bluetooth V4.2 Classic / LE)** /

Powered USB

* WLAN: 802.11a/b/g/n(2.4G+5G)

**Bluetooth: Class 1, MFi certified

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

Reliability

Thermal Print Head (TPH)

250 km ***

Auto Cutter

3 Million Cuts ***

***** Specified Paper**

- TF50KS-E (Paper thickness: 65µm)

: Nippon Paper industries Co., Ltd.

- PD 150R (Paper thickness: 75µm)

: New Oji Paper Mfg, Co., Ltd

- PD 160R (Paper thickness: 75µm)

: New Oji Paper Mfg, Co., Ltd.

- P350 (Paper thickness: 62µm)

: Kansaki Specialty Paper, Inc. (USA)

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver, OPOS Driver, JPOS Driver,

Linux / Mac CUPS Driver,

Virtual COM USB/Ethernet Driver, Utility Program

SDK

iOS SDK, Android SDK, Windows SDK ,

Windows Runtime SDK

Fonts / Graphics / Symbologies

Character Size

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24

KOR, CHN, JPN: 24 x 24

Characters Per Line

SRP-380: Font A: 42 Font B, C: 56

KOR, CHN, JPN: 21

SRP-382: Font A: 48 Font B, C: 64

KOR, CHN, JPN: 24

Character Sets

Alphanumeric: 95

Extended Graphics: 128 x 35 page

International: 32

Unicode : UTF-8, UTF-16, UTF-32

Graphics

Supporting user-defined fonts, graphics, formats, and logos

Barcode Symbologies

1D: Coda Bar, Code 39, Code 93, Code 128, EAN-8, EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, GS1-128, GS1 DataBar Stacked / Omnidirectional / Truncated / Limited / Expanded, PDF417, QR code



BR-SRP-380-KR-MAY17-V1-NF

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON®

BIXOLON Co.,Ltd.
+82 (0) 31 218 5500
sales@bixolon.com

BIXOLON America Inc.
+1 858 764 4580
sales@bixolonusa.com

BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixolon.de

www.Bixolon.com

