

SLP-DX420

4인치 감열식
데스크톱 라벨 프린터




견고한 바디와 우수한 성능



우수한 인쇄 성능

- 주요 프로그래밍 언어와의 높은 호환성
- 7ips (178 mm/sec)의 빠른 데이터 처리와 인쇄속도 지원
- Smart Media Detection™: 용지 타입 및 라벨 길이 자동 인지

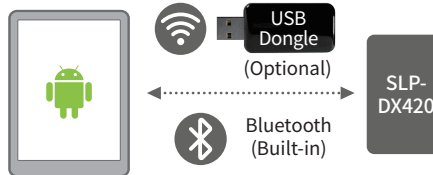

All in one Plus™ 인터페이스

- 표준: USB + 시리얼 + 패러럴
 - 옵션1: USB + 시리얼 + 이더넷 + WLAN
 - 옵션2: USB + WLAN + 블루투스
- WLAN: 802.11a/b/g/n/ac USB dongle 타입 (옵션)
블루투스: 내장형, MFi 인증



Function-keys

사용자 친화적인 디자인

- 조절가능한 용지 가이드로 손쉽게 용지교체 가능
- 사용이 편리한 Pause 및 Cancel 버튼
- 필러, 오토커터 옵션

SLP-DX420

4인치 감열식
데스크톱 라벨 프린터

Specifications

Printer Specifications

Print Method

Direct Thermal

Print Speed

SLP-DX420: Up to 7 ips (178 mm/sec)
SLP-DX423: Up to 5 ips (127 mm/sec)

Print Resolution

SLP-DX420: 203 dpi
SLP-DX423: 300 dpi

Print Width

SLP-DX420: Up to 108 mm
SLP-DX423: Up to 105.7 mm

Print Length

Up to 1,000 mm

Sensor

Transmissive, Reflective (Adjustable),
Head open

Media Characteristics

Media Type

Gap, Black Mark, Notch, Continuous, Fan-Fold

Media Width

20 ~ 110 mm

Media Roll Diameter

Up to 130 mm

Media Thickness

0.06 ~ 0.20 mm

Supply Method

Easy Paper Loading

Inner Core

25.4 ~ 38.1mm

Physical Characteristics

Dimensions (W x L x H)

194 x 243 x 171 mm
(7.63 x 9.56 x 6.73 inch)

Weight

2.20 kg (4.85 lbs.)

Electrical

EnergyStar Certified,
External Power Adaptor 100-240V AC, 50/60Hz

Performance Characteristics

Memory

64 MB SDRAM, 128 MB Flash

Interface

Standard: USB + Serial + Parallel
Optional: ① USB + Serial + Ethernet + WLAN
② USB + WLAN + Bluetooth

WLAN: 802.11a/b/g/n/ac Dongle type
- requires a USB Host port (Optional)

Bluetooth: V5.0 (MFi certified)

Real Time Clock

Supported

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)
Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH
Storage: 10 ~ 90% RH

Software

Emulation

SLCS™, BPL-Z™, BPL-E™

Driver / Utility

Windows Driver (Europlus / Seagull),
Linux / Mac CUPS Driver,
Virtual COM USB / Ethernet Driver,
Utility Program, OPOS / JPOS Driver,
Bartender Ultralite for BIXOLON, Label Artist-II™,
SAP® Device Driver

SDK / Plugin

Android / iOS / Windows SDK, Linux SDK,
Chrome SDK, Xamarin SDK, Web Print SDK

Application

Label Artist™ Mobile (Android, iOS),
mPrint App (iOS), mPrint Server (Windows, iOS)

MDM

BIXOLON Profile Manager
- XPM™, XCM™ (Windows, Android)

Fonts / Graphics / Symbologies

Fonts

Bitmap Fonts (10 SLCS™, 16 BPL-Z™, 5 BPL-E™),
Scalable Fonts (1 SLCS™, 1 BPL-Z™),
23 Code page,
Unicode supported (UTF-8, UTF-16LE, UTF-16BE)

Graphics

Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies

1D: Codabar, Code 11, Code 39, Code 93,
Code 128, EAN-13, EAN-8, Industrial 2-of-5,
Interleaved 2-of-5, Logmars, MSI, Plessey,
Postnet, GS1 DataBar (RSS-14), Standard
2-of-5, UPC/EAN extensions, UPC-A, UPC-E,
IMB
2D: Aztec, Codablock, Code 49, Data Matrix,
MaxiCode, MicroPDF417, PDF417, QR code,
TLC 39

Accessories

Optional

Peeler, Auto Cutter, External Paper Supply,
WLAN Dongle (Consensus required),
Serial cable, Parallel cable, USB cable